# DELLA BOYOMA

*"Safety is non-negotiable"*

## TANNING TARGET
Firmness – No stretch – No elongation - No breaking

Mineral tanning, double mineral/vegetable tanning, wax/tallow nourishment.

## FINISHING TARGET
Natural

Aniline finish, wax finish, grain and flesh side hardener.

## HORSE EQUIPMENT
Hard Streched Leather





# ENRICH YOUR LEATHER

## COLORS

- Dyed through or surface dyed
- Shiny / matt

## FEEL

- Very hard - 100% mineral tanning
- Semi hard - double tanning (veg & min)

## GRAIN

- Natural grain
- Grain prints available

## THICKNESS

- 4/4,5mm
- 4,5/5mm
- 4,8+ mm

## HIDES

- 1/3 Butt


# CUTTING SERVICE

We provide a cutting service to offer 100% usable leather avoiding any waste for the customer.
No waste means more savings.

# LABELS, ORIGIN & TRACEABILITY

- Responsibly farmed bull leather
- 100% European origin
- Belgium Artisan Certified
- Sustainable water consumption
- Renewable chemicals REACH compilance



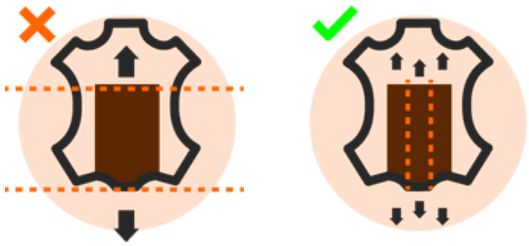

Stretching on 1/3 croupons/butts, allows to stretch the stiffer fibres on the spine and the looser ones on the sides to the same maximum firmness.
There is no compromise on safety. We provide an overall homogeneous stretch.

## TEST TABLE

| | METHOD | | | SAMPLE | | RESULT DELLA | RESULT BOYOMA |
|---|---|---|---|---|---|---|---|
| Veslic rub fastness dry | 1kg/100 c | ISO 11640 | | ISO 2419 | | 2 | 3/4 |
| Veslic rub fastness wet | 1kg/25 c | ISO 11640 | | ISO 2419 | | 3 | 3/4 |
| Tear load | | | TVS 10KN100 | | 25x200 mm | 493kg | 426,5kg |
| Tear resistance | | | TVS 10KN100 | | 25x200 mm | 4,93kg/mm² | 3,55kg / mm² |
| Elongation at rupture | | | TVS 10KN100 | | 25x200 mm | 60,2mm | 62,2mm |
| Tensile endurance elongation | 75-0,5kg/ 1000 c | ISO 3376 | TVS 10KN100 | ISO 2419 | 25x200 mm | 1,28% | 4,2% |

