



MAXILIFT. EFFICIENCY ON THE WATER

Maxilift: Special range of hydraulic cranes ideal for marine applications. Light, easy to use and install, they grant high protection against corrosion and long lasting lifetime.


maxilift
—  **Next Hydraulics®**
MARINE APPLICATIONS
www.maxiliftcrane.com | www.nexthydraulics.com



 **Next Hydraulics®**

 **Next Hydraulics®**
RAISE YOUR EXPECTATIONS

SPECIFICATIONS

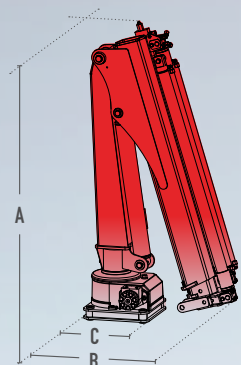

Mod.	Dimensions mm			Lifting capacity kNm	Slewing angle (worm screw)	Max angle slope	Basic crane weight kg
	A	B	C				
230	1420	790	310	22	360° [330°]	5°	225-275
270	1420	790	310	25	360° [330°]	5°	225-275
270 L	1510	1130	310	25	360° [330°]	5°	235-290
330	1550	820	370	32	360° [330°]	5°	270-345
380	1630	870	370	37	360° [330°]	5°	310-395

230

230.2

m	1,20	2,20	3,20	4,20	5,20
kg	1800	1000	680	500	350

230.3

m	1,26	2,26	3,26	4,20	5,20
kg	1800	950	650	500	350

270

270.2

m	1,20	2,20	3,20	4,20	5,20
kg	2150	1180	810	600	400

270.3

m	1,26	2,26	3,26	4,20	5,20
kg	2030	1130	780	600	400

270 L

270L.2

m	1,40	2,60	3,80	5,00	6,00
kg	1870	1000	680	500	350

270L.3

m	1,46	2,66	3,86	5,00	6,00
kg	1770	950	650	500	350

330

330.2

m	1,30	2,30	3,30	4,36	5,36	6,36
kg	2500	1400	1000	700	550	420

330.3

m	1,36	2,36	3,36	4,36	5,36	6,36
kg	2350	1350	950	700	550	420

330.4

m	1,43	2,43	3,43	4,43	5,36	6,36
kg	2200	1300	900	700	550	420

380

380.2

m	1,45	2,55	3,65	4,72	5,79	6,79
kg	2650	1500	1050	760	630	500


380.3

m	1,52	2,62	3,72	4,72	5,79	6,79
kg	2550	1450	1000	800	630	500

380.4

m	1,59	2,69	3,79	4,79	5,79	6,79
kg	2400	1400	980	760	630	500


SPECIFICATIONS

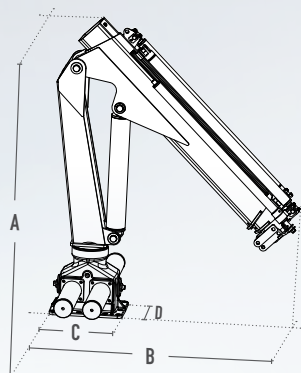

Mod.	Dimensions mm				Lifting capacity kNm	Slewing angle (double rack)	Max angle slope	Basic crane weight kg
	A	B	C	D				
ML 400	1830	1280	450	350	42	 360° (295°)	15°	460-500
ML 400 L	1800	1450	450	350	42	360° (295°)	15°	490-540
ML 500	1830	1280	450	350	48	360° (295°)	15°	470-510
ML 500 L	1800	1450	450	350	48	360° (295°)	15°	500-550


400

400.2

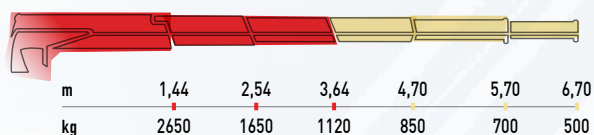


500


500.2

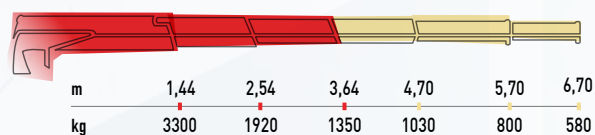

400.3

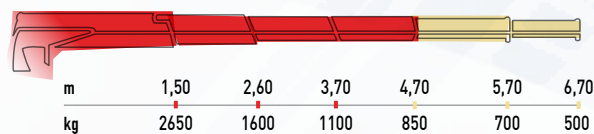


500.3

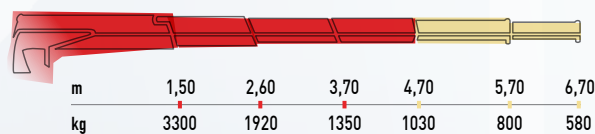


400 L

400L.2

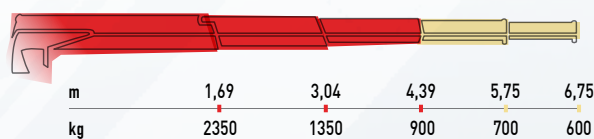


500 L


500L.2

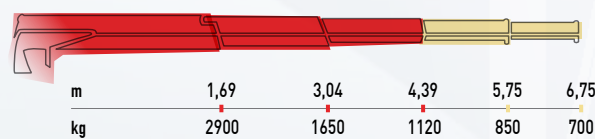

400L.3

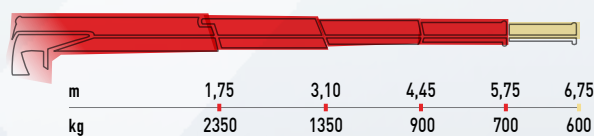

500L.3

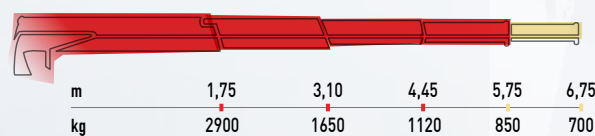

 Hydraulic extensions

 Optional manual extensions



Hydraulic winch on request



MP.0.182 UK 10/2014

MAXILIFT. EFFICIENCY ON THE WATER

Marinized treatment specifications

- **Shot blasting** of structural elements
- **Painting:**
 - Organic epoxy galvanizing primer 30-40 μ
 - Bi-component epoxy priming coat 60-70 μ
 - Bi-component polyurethan final painting 60-70 μ
- **NITOX treatment** on link pins
- **Rods treatment** with guarantee of 250 hours in salt spray test
- **Anti-corrosion treatment** or painting on **all hydraulic valves**
- **Stainless steel piping**
- "Offshore" hoses and **stainless steel hose terminals**
- **Stainless steel fittings**
- 500 hours **zinc based anticorrosion treatment** protection